


Navigating the menus of the NAUCON-1000 unit

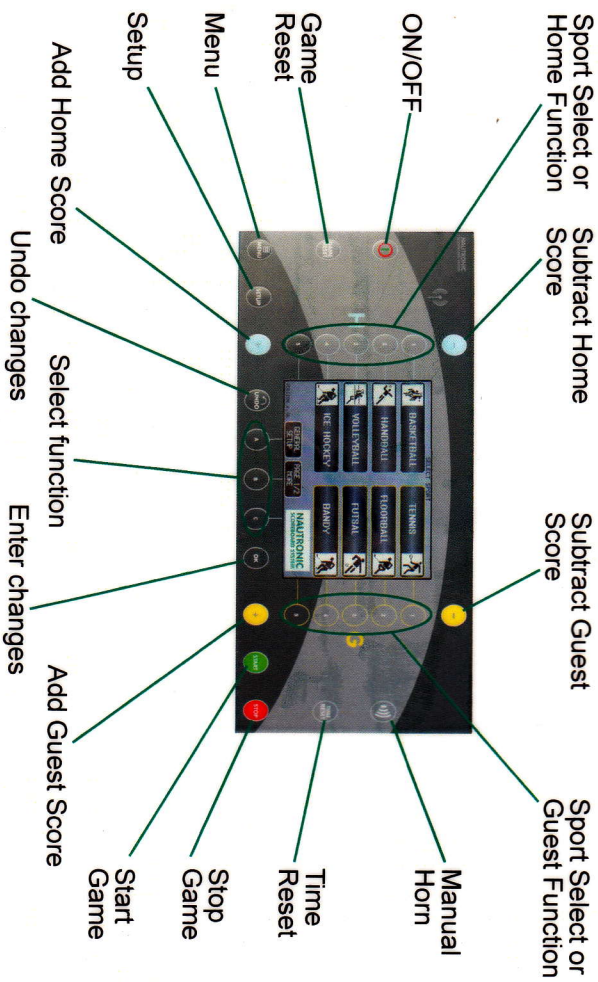

Basic use

Turn ON console:	Press	
Turn OFF console:	Press	and
Select sport:	Press the touch screen or the blue and yellow buttons 1-4	
Exit sport:	Press	
Start/stop game:	Press	or
Add/subtract home score:	Press	or
Add/subtract guest score:	Press	or
Reset game time:	Press	
Manual horn:	Press	
Undo last choice:	Press	

Editing home/guest team lineup

The home/guest team lineup text menu can be accessed via all sports, by pressing the edit home/guest team lineup button placed in the sport setup menu (fig. 1).

When selected, a window is displayed with the option to edit the team name/player numbers and names (fig. 2).

Home/guest team lineup functions

When editing home/guest team lineup, the following functions are available.

Team name: Press the buttons, to edit the team name. When selected, a keyboard is displayed where the team name can be entered. It is possible to enter up to 32 characters (like fig. 3).

Player name: Press the buttons, to edit the specific player name. When selected, a keyboard is displayed where the player name can be entered. It is possible to enter up to 20 characters (fig. 3).

Player numbers: Press the buttons, to edit the specific player number. When selected, a numeric keyboard is displayed where the player number can be entered. It is possible to enter the numbers 0-99 (fig. 4).

Default names & no: Press the button, to reset all names and numbers back to default (fig. 2).

USB import: This function imports home/guest team lineup texts that have been saved on a USB-key.

To import saved home/guest team lineup texts, insert a USB-key and press the USB import button (fig. 2).

USB export: This function exports edited home/guest team lineup texts to a USB-key.

To export home/guest team lineup texts, insert a USB-key and press the USB export button (fig. 2).

Editing advertising

The advertising menu can be accessed via all sports, by pressing the edit advertising button placed in the extra menu (fig. 5).

When selected, a full qwerty keyboard is displayed. Max. 1000 characters can be entered. The advertising text is shown in the home/guest team text display.




fig. 1




fig. 2




fig. 3




fig. 4




fig. 5